Hotel controller

HM - 100

Karakteristike

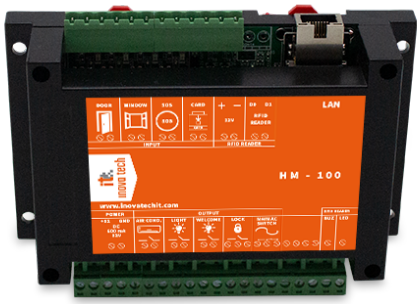

- 5 Relejnih izlaza
- 4 Ulazne zone
- 1 Wiegand ulaza
- TCP/IP komunikacija

Opis uređaja

Uređaj za kontrolu pametne sobe. Služi za optimizacija troskova, kontrolu rizika, sakupljanje velikog broja podataka I automatizacija uredjaja (svetla, klima, vrata, grejanje, hladjenje..)

Inova Tech d.o.o.
Ratka Mitrovica 130, 11090 Belgrade, tel: +381 11 63 100 26
office@inovatechit.com
wwww.inovatechit.com

Legal notice
Reproduction, transfer, distribution or storage of part or all of the contents in this document in any form without the prior written permission is prohibited. All rights reserved. All trademarks mentioned herein belong to their respective owners.
Copyright © 2021 Inova Tech

Specifikacija

Dimenzije:	146,6 mm x 89 mm
Napon napajanja:	12V
Potrošnja u stand by režimu:	10 mA
Maksimalna potrošnja:	500 mA
Temperatura:	-30°C do +80°C
Protokoli: TCP/IP, UDP ARP, DHCP, BOOTP, SNMP, RIP, RARP, HTTP, TFTP, ICMP	
Mod rada	Klijent/Server
Relejni izlazi	5
Ulazne zone	4
Wiegand	1 x 26bit
Ethernet interfejs: IEEE 802.3, IEEE 802.3u 10/100BASE-TX standard 10/100BASE-TX RJ45 port do maksimum 100m 1.5KV Isolation	
Podešavanje: Web Interface, Web CLI Telnet	
Web OTA Wireless Upgrade	

Inova Tech d.o.o.
Ratka Mitrovica 130, 11090 Belgrade, tel: +381 11 63 100 26
office@inovatechit.com
wwww.inovatechit.com

Legal notice
Reproduction, transfer, distribution or storage of part or all of the contents in this document in any form without the prior written permission is prohibited. All rights reserved. All trademarks mentioned herein belong to their respective owners.
Copyright © 2021 Inova Tech