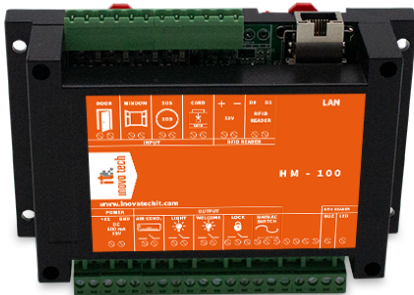


**sheet**

Room controller IP/CAN

**RC-100****Karakteristike**

- ◆ 5 Relejnih izlaza
- ◆ 4 Ulazne zone
- ◆ 1 Wiegand ulaza
- ◆ TCP/IP komunikacija

**Opis uređaja**

**Uređaj** za kontrolu pametne sobe. Služi za optimizacija troškova, kontrolu rizika, sakupljanje velikog broja podataka I automatizacija uređaja (svetla, klima, vrata, grejanje, hlađenje..).

**Legal notice**

Reproduction, transfer, distribution or storage of part or all of the contents in this document in any form without the prior written permission is prohibited. All rights reserved. All trademarks mentioned herein belong to their respective owners.

## Specifikacija

Dimenzije:	146,6 mm x 89 mm
Napon napajanja:	12V
Potrošnja u stand by režimu:	10 mA
Maksimalna potrošnja:	500 mA
Temperatura:	-30°C do +80°C
Protokoli:	TCP/IP, UDP, ARP, DHCP, BOOTP, SNMP, RIP, RARP, HTTP, TFTP, ICMP
Mod rada	Klijent/Server
Relejni izlazi	5
Ulazne zone	4
Wiegand	1 x 26bit
Ethernet interfejs:	IEEE 802.3, IEEE 802.3u 10/100BASE-TX standard 10/100BASE-TX RJ45 port do maksimum 100m 1.5KV Isolation
Podešavanje:	Web Interface, Web CLI Telnet
Web OTA Wireless Upgrade	